



KR/KRS 10

Installation drawing

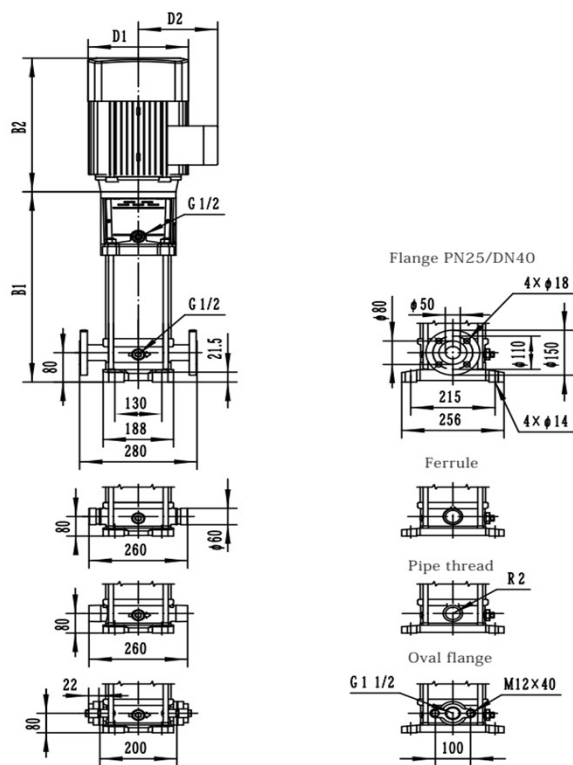

*KR/KRS 10-15 ~ 10-22 No oval flange connection

Performance curve

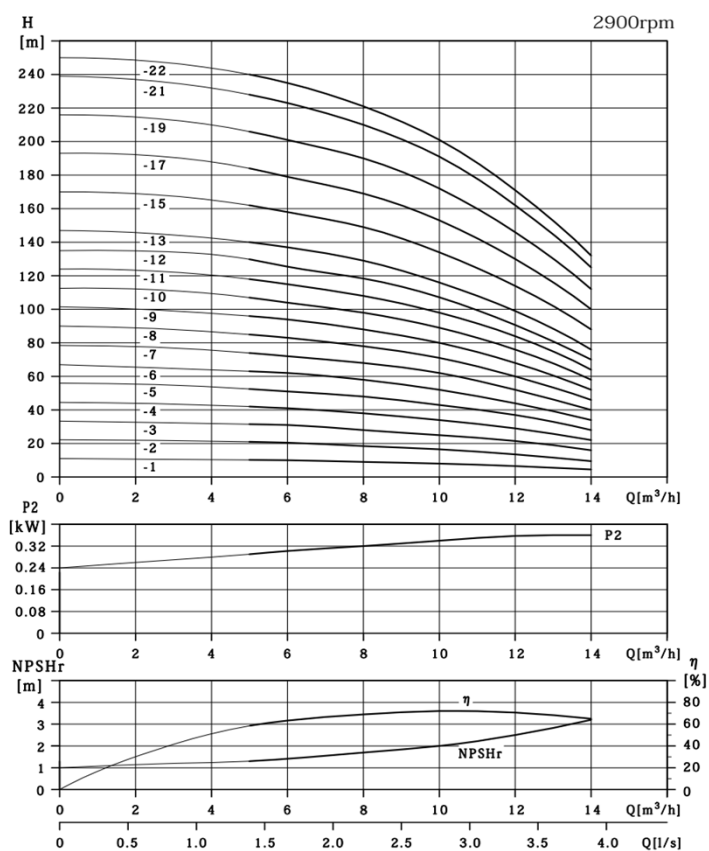

Model	Motor (kW)	Q (m³/h)	0	5	6	8	10	12	14
KR10-1	0.75	H (m)	11	10.2	10	9	8	6.5	4.5
KR10-2	0.75		22.2	21	20.5	18.5	16.5	13.5	9.5
KR10-3	1.1		33.3	31.5	31	28	25	21.5	16
KR10-4	1.5		44.5	42	41	38	34	29	22
KR10-5	2.2		56	52.5	51	48	43	37	28
KR10-6	2.2		67	63	62	58	52	44	34
KR10-7	3		78.5	74	72	68	62	52	40
KR10-8	3		90	85	83	78	71	60	46
KR10-9	4		101.5	96	94	88	80	68	52
KR10-10	4		112.5	107	104	98	89	76	58
KR10-11	4		124	118	115	108	98	84	64
KR10-12	4.5		135	129	126	118	107	91	70
KR10-13	5.5		147	140	137	129	116	99	76
KR10-15	5.5		170	162	158	149	134	114	88
KR10-17	7.5		193	184	179	169	153	130	100
KR10-19	7.5		216	206	201	190	172	146	112
KR10-21	7.5		239	228	223	210	191	162	125
KR10-22	11		250	240	235	221	201	171	132

Model	Dimensions (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
KR10-1	347	245	592	170	142	40
KR10-2	347	245	592	170	142	41
KR10-3	377	245	622	170	142	43
KR10-4	417	290	707	190	155	49
KR10-5	447	290	737	190	155	53
KR10-6	477	290	767	190	155	54
KR10-7	517	345	862	197	165	64
KR10-8	547	345	892	197	165	65
KR10-9	577	355	932	230	188	73
KR10-10	607	355	962	230	188	74
KR10-11	637	355	992	230	188	75
KR10-12	667	355	1022	230	188	87
KR10-13	775	390	1165	260	208	99
KR10-15	835	390	1225	260	208	101
KR10-17	895	390	1285	260	208	106
KR10-19	955	390	1345	260	208	107
KR10-21	1015	390	1405	260	208	108
KR10-22	1075	500	1575	330	255	173