


● Performance curve


ISO9906 Annex A

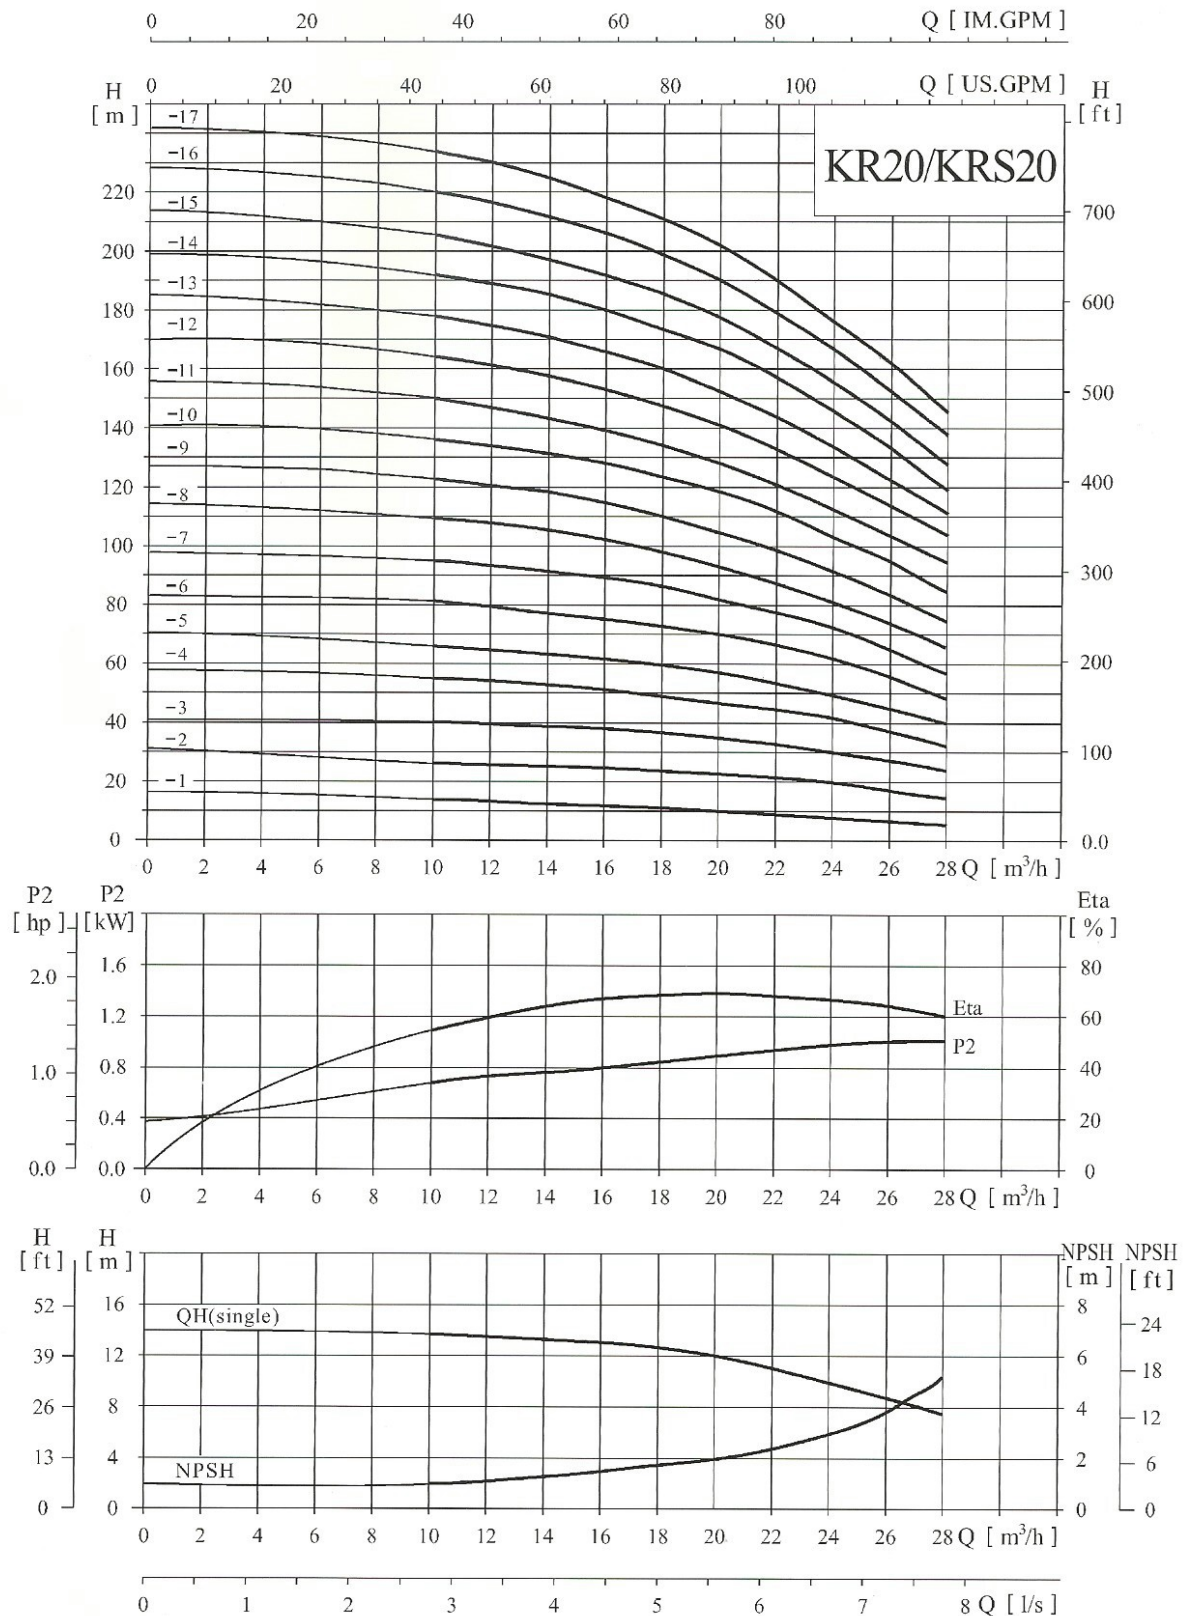

● Performance table

Model	Power (kw)	Q (m ³ /h)	10	12	14	16	18	20	22	24	26	28
KR20-1	1.1	H (m)	13.5	13	12.5	12	11	10	9	8	7	6
KR20-2	2.2		27	26.5	26	25	24	23	22	20	18	15
KR20-3	4.0		40	39.5	39	38	37	35	33	30	27	24
KR20-4	5.5		54	53	52	51	49	47	44	41	37	33
KR20-5	5.5		67	66	64	62	60	58	55	50	45	40
KR20-6	7.5		81	79	77	75	73	70	66	61	55	49
KR20-7	7.5		95	93	91	89	86	82	77	71	65	58
KR20-8	11		109	107	105	102	99	94	89	82	75	67
KR20-10	11		136	134	131	128	124	118	111	103	95	85
KR20-12	15		164	162	158	154	149	142	133	124	114	102
KR20-14	15		192	189	185	180	174	166	156	145	133	119
KR20-17	18.5		234	230	225	219	212	202	190	177	162	145

● Installation sketch

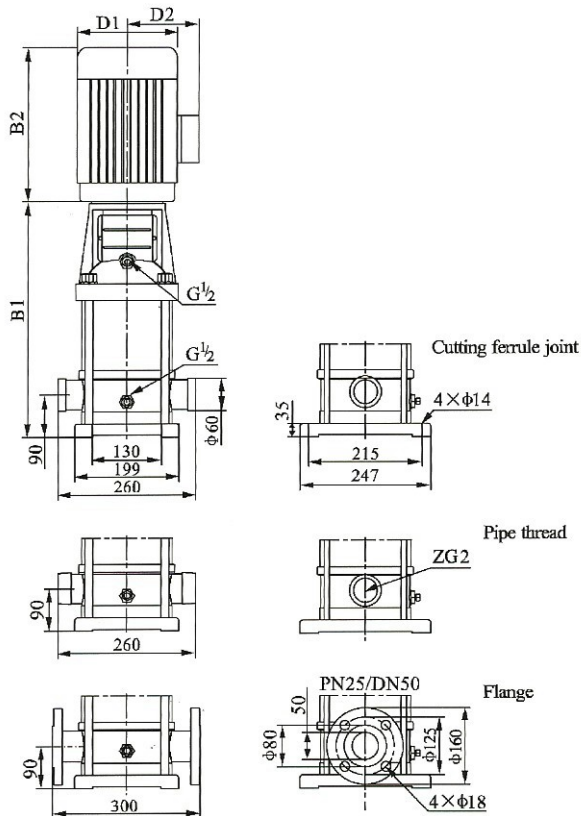

● Size and weight

Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
KR20-1	387	245	632	170	142	32
KR20-2	397	290	687	190	155	43
KR20-3	452	335	787	230	188	57
KR20-4	517	430	947	260	208	72
KR20-5	562	430	992	260	208	74
KR20-6	607	430	1037	260	208	82
KR20-7	652	430	1082	260	208	84
KR20-8	785	490	1275	330	255	140
KR20-10	875	490	1365	330	255	145
KR20-12	965	490	1455	330	255	160
KR20-14	1055	490	1545	330	255	165
KR20-17	1190	550	1740	330	255	190

The overall dimensions of the single-phase motor and explosion-proof motor are a little changed. Pls contact us for details.