


● Performance curve


ISO9906 Annex A

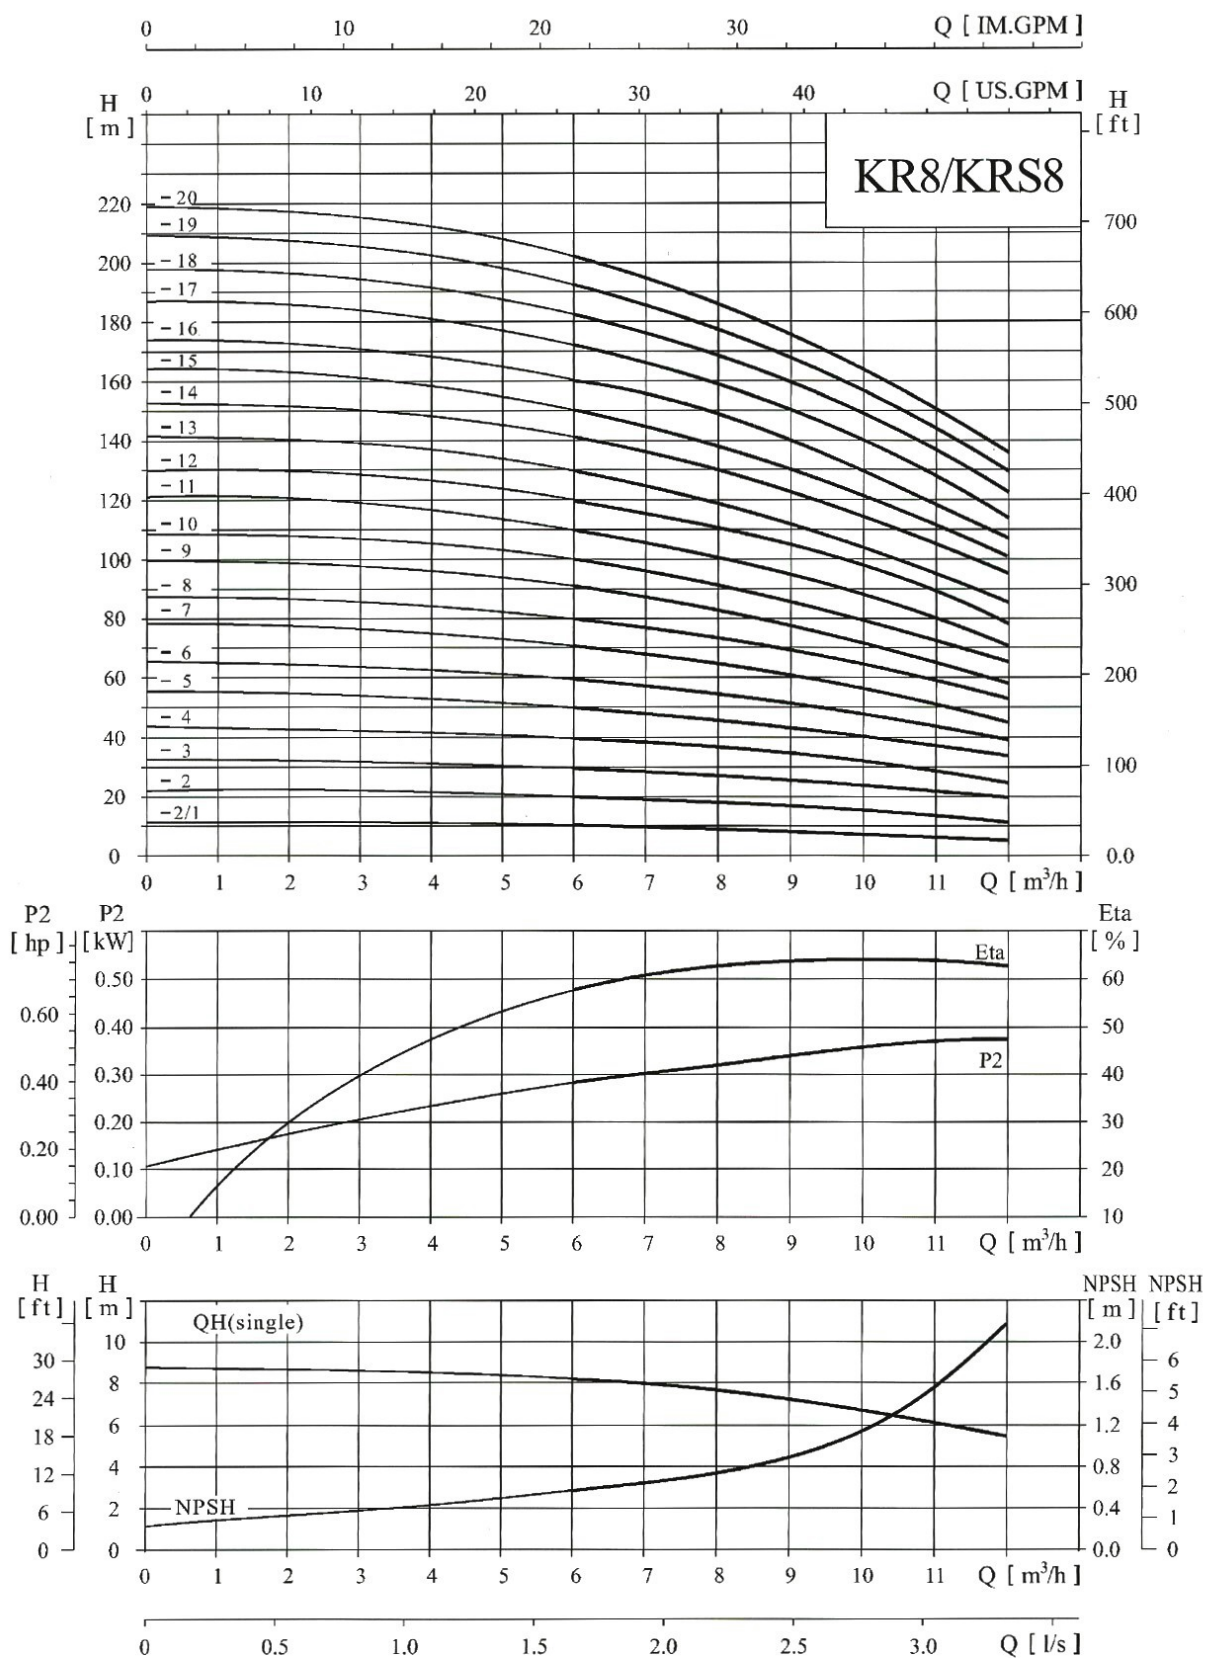

● Performance table

Model	Power (kw)	Q (m³/h)	5	6	7	8	9	10	11	12
KR8-2/1	0.75	H (m)	10	9.5	9.3	9	8.5	8	7	6
KR8-2	0.75		20	19.5	19	18	17	16	14	13
KR8-3	1.1		30	29.5	28.5	27	25	24	21	19
KR8-4	1.5		41	39.5	38	36	34	32	28	26
KR8-5	2.2		52	50	48	45	42	40	36	32
KR8-6	2.2		62	60	57	54	51	48	43	39
KR8-8	3.0		83	80	77	73	69	65	58	52
KR8-10	4.0		104	100	97	92	87	81	73	65
KR8-12	4.0		124	120	116	111	104	92	87	78
KR8-14	5.5		145	141	136	130	122	113	102	92
KR8-16	5.5		166	161	156	148	139	130	118	106
KR8-18	7.5		187	182	175	167	157	146	134	120
KR8-20	7.5		208	202	195	186	175	163	150	135

● Installation sketch

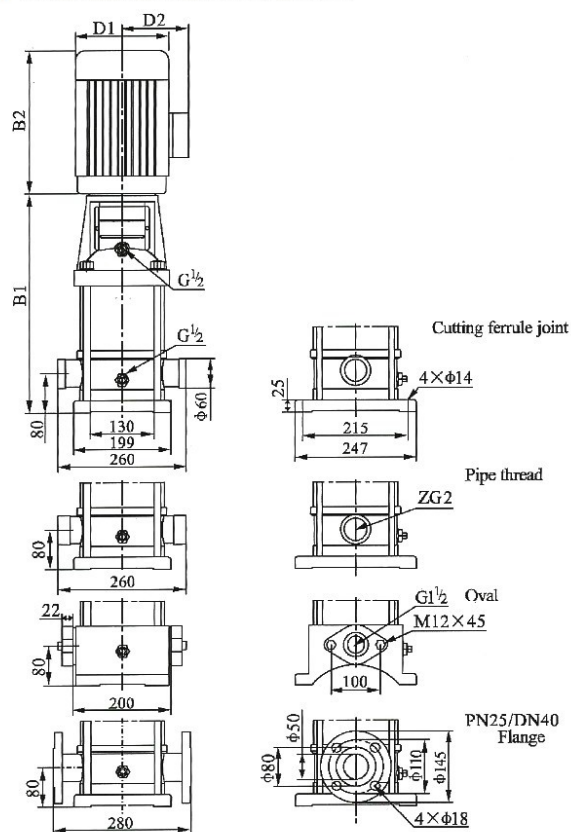

● Size and weight

Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
KR8-2/1	347	245	592	170	142	22
KR8-2	347	245	592	170	142	22
KR8-3	377	245	622	170	142	32
KR8-4	417	290	707	190	155	32
KR8-5	447	290	737	190	155	42
KR8-6	477	290	767	190	155	42
KR8-8	547	315	862	197	165	47
KR8-10	607	335	942	230	188	57
KR8-12	667	335	1002	230	188	57
KR8-14	747	430	1177	260	208	82
KR8-16	807	430	1237	260	208	82
KR8-18	867	430	1297	260	208	92
KR8-20	927	430	1357	260	208	92

KR8-14 ~ 8-20 sub-connection of pipeline without oval flange

The overall dimensions of the single-phase motor and explosion-proof motor are a little changed. Pls contact us for details.