

EUSR SERIES 50HZ

Submersible Drainage Pump



EUSR SERIES 50HZ

Submersible Drainage Pump

Feature

- / Submersible single-phase portable residue drainage pump.
- / Rubber lined base plate protects the floor surface from scratching.
- / The wear parts are made of abrasion-resistant materials.
- / Discharge direction is selectable between vertical and inclined


Application

- / Residentail, commercial, industrial dewatering and site drainage
- / Construction sites and civil engineering projects
- / Basement, parking lots, removing residue water

Specifications

Liquid Temperature		0~40°C (32~104°F)
Submersible depth		10M
Motor Part	Frequency	50Hz
	Pole	2 Pole
	Type	Dry Type
	Insulation	Class B
	Protection	IP 68
Pump Part	Protector	Auto-cut
	Bearing	Ball Type
	Mechanical seal	Dual. Mechanical Seal
	Impeller	Semi-Open

Performance Curve

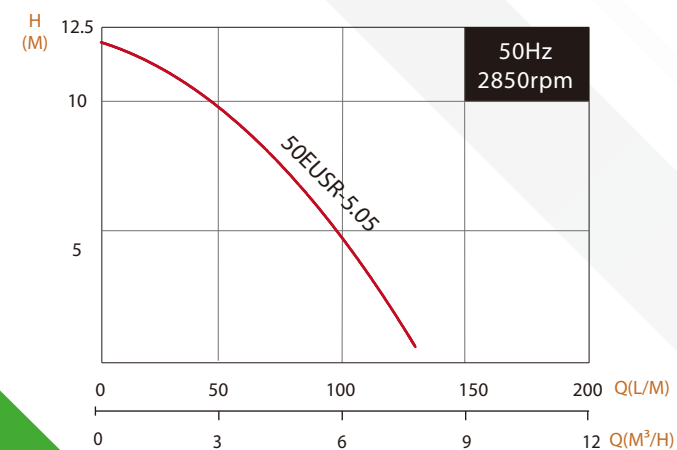


Steel coated with thermoplastic polyester elastomer



EUSR Impeller

Dimensions

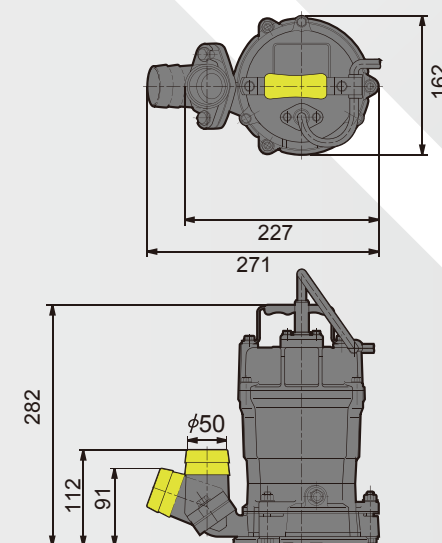

Unit: mm

Data Chart

Type	Output		Discharge	F.L.A.		Rated	Maximum		Cable
	HP	KW	Inch	1ø 230V	3ø 400V	Head m	Cap. LPM	Head m	Cap. LPM
50EUSR-5.05	0.5	0.37	2"	3	0.9	7	75	12	12