

Three watertight chambers level regulator with freely suspended trim variation.

Unlike traditional floats that float on the water surface, the TAURUS, thanks to its special construction with integrated counter weight, remains underwater. Used in couple with another of the same type allows you to adjust the levels of minimum and maximum. It's also possible to use a third and fourth regulator respectively for minimum and maximum alarm.

## Application

INDUSTRIAL - Drainage Plants

DOMESTIC - Pumping Stations


MUNICIPALITY - Dirty water systems


The third watertight chamber and the weight of the metallic grit grant the typical overturning functioning



## Specificaiton

CABLE	H05 RN-F 3X1 H07 RN-F 3X1 H07 RN-F 3G1 H07 RN8-F 3G1 H07 RN-F 3G1 Oil Resistant
CASING	POLYPROPYLENE
SPECIFIC GRAVITY	0.95-1.05Kg/dm³
GROMMET	EPDM
POWER SUPPLY	MAX. 10(8)A 250V
ACTIVATION ANGLE	20°
DEPTH	MAX. 20M - 65.6FT
TEMPERATURE	MAX. +50°C (+122°F)
PROTECTION GRADE	IP68
CLASS	I
CERTIFICATION	 <b>EAC</b> <b>CE</b>

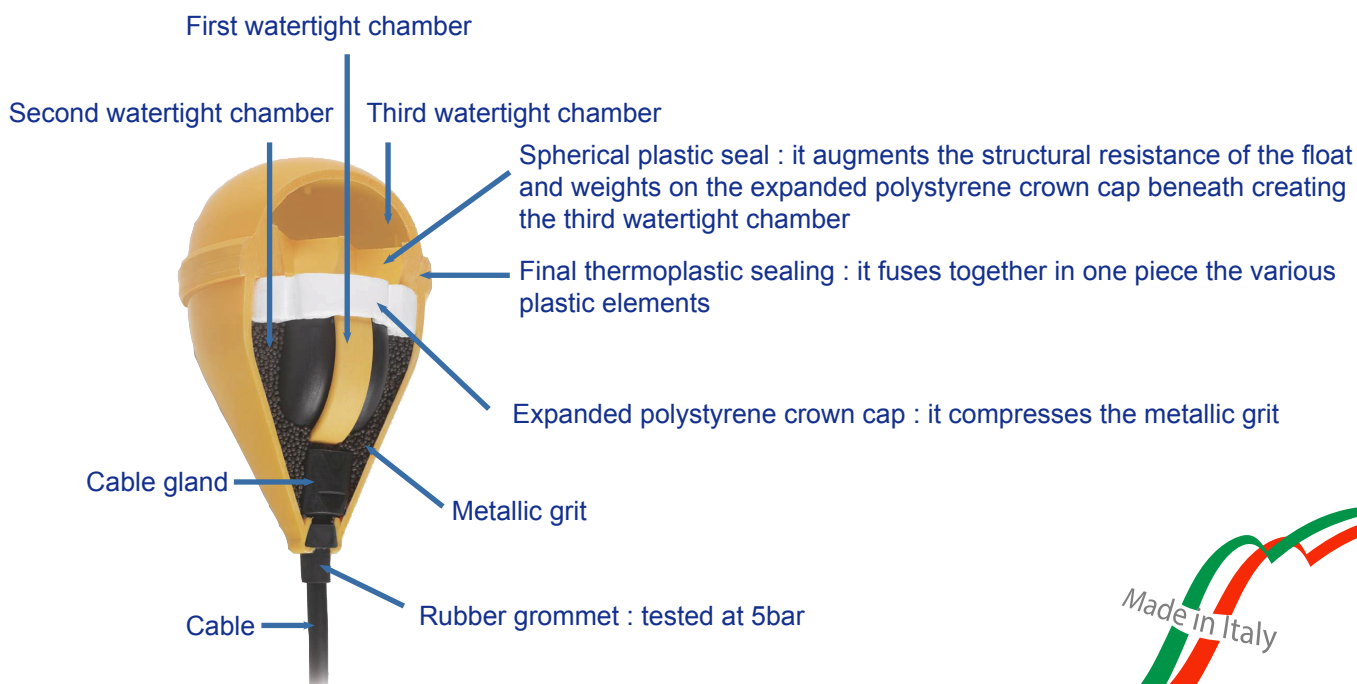





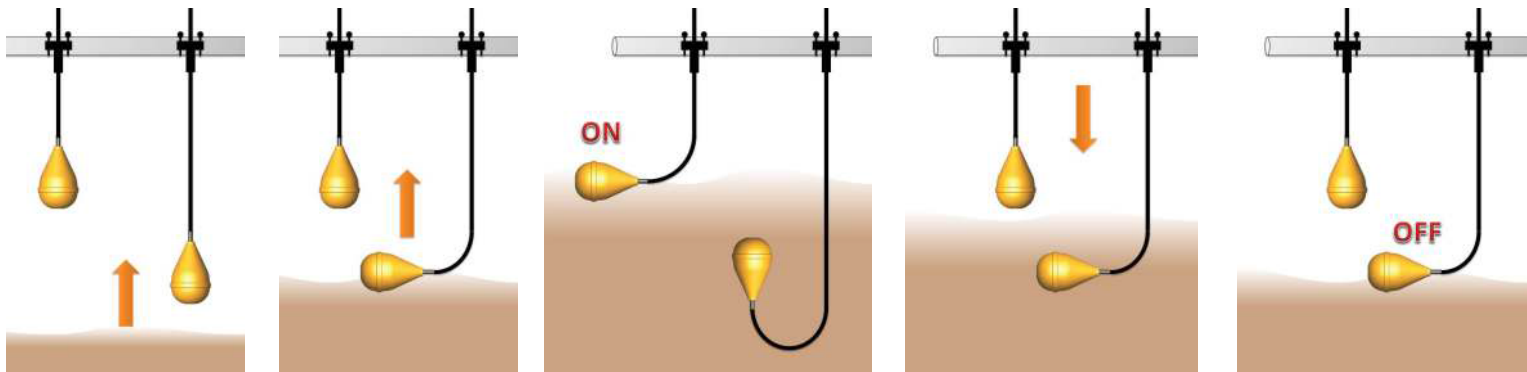


The tank fills

Hight level starts the pump

The tank drains

Low level stops the pump

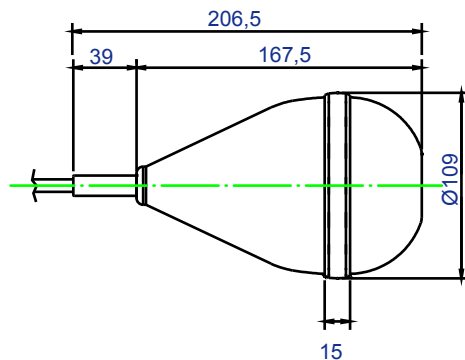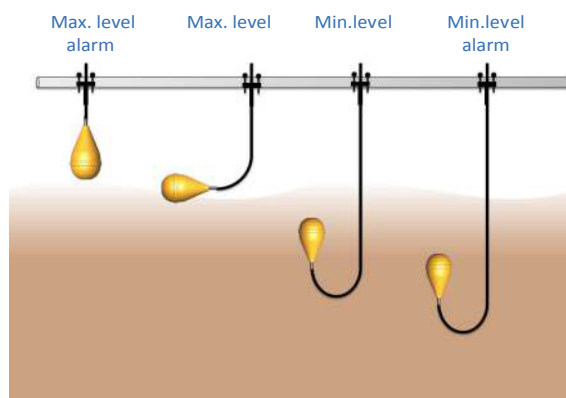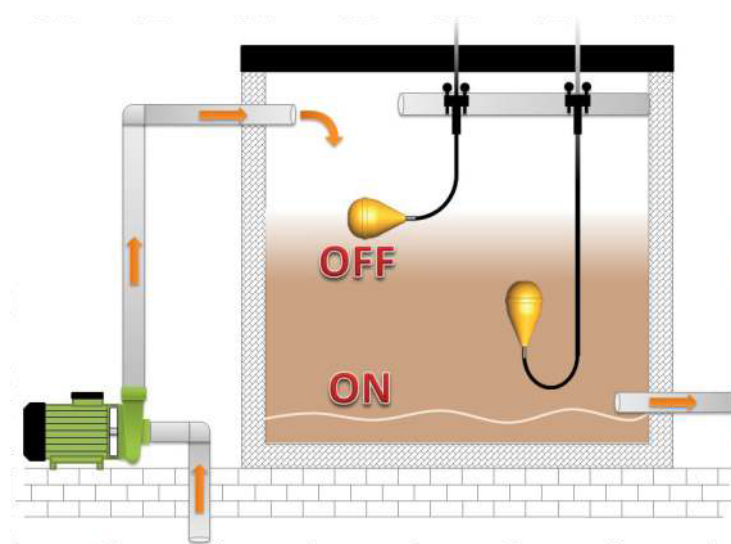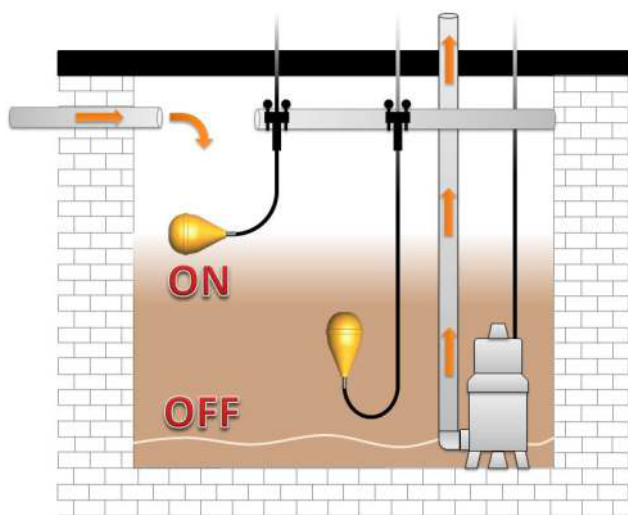

Fixing Kit<sup>1</sup>

1. not included accessory

