

Features

Intergrated handle, easy to install

Working conditions

Medium temperature: 5 - 50℃


Environmental temperature: ≤ 50℃

Max. working pressure: 0.3MPa




Technical Data

Model	Qmax	Hmax	Curve	Voltage/Hz	Power (P1)		Amps	Fitting size	G.W.
	(l/min)	(m)			kW	HP		(mm)	(kg)
CIM-120	350	12.5	1	220V / 50Hz	0.9	1.2	4.6	60.3 or 63	15.8
CIM-150	380	16.5	2	220V / 50Hz	1.1	1.5	5.2	60.3 or 63	16.5
CIM-200	500	20	3	220V / 50Hz	1.5	2	7	60.3 or 63	18.8
CIM-250	560	19.5	4	220V / 50Hz	1.85	2.5	8.6	60.3 or 63	20.5
CIM-300	600	22	5	220V / 50Hz	2.2	3	10	60.3 or 63	22
CIM-400	650	25	6	220V / 50Hz	3	4	14	60.3 or 63	25.3

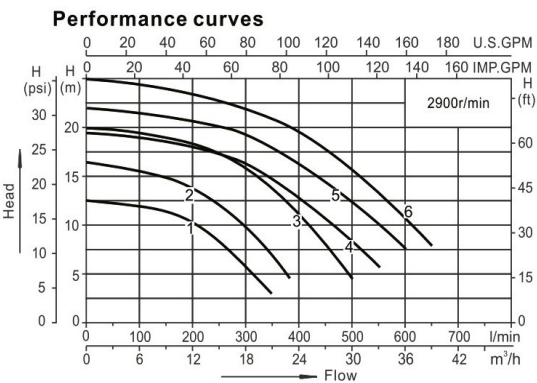


Overall dimension

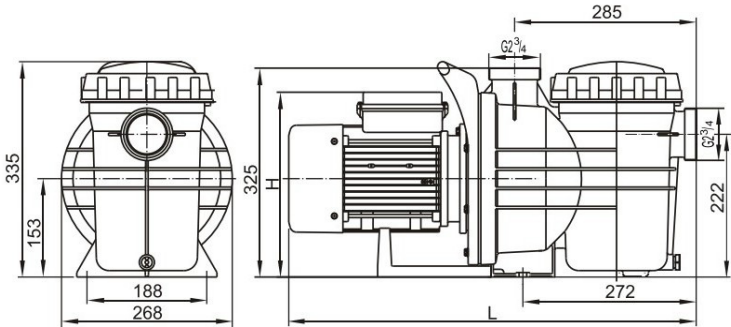

Model	L	H
CIM-120	603	264
CIM-150	603	264
CIM-200	603	267
CIM-250	603	278
CIM-300	616	285
CIM-400	640	288

Parts Drawing

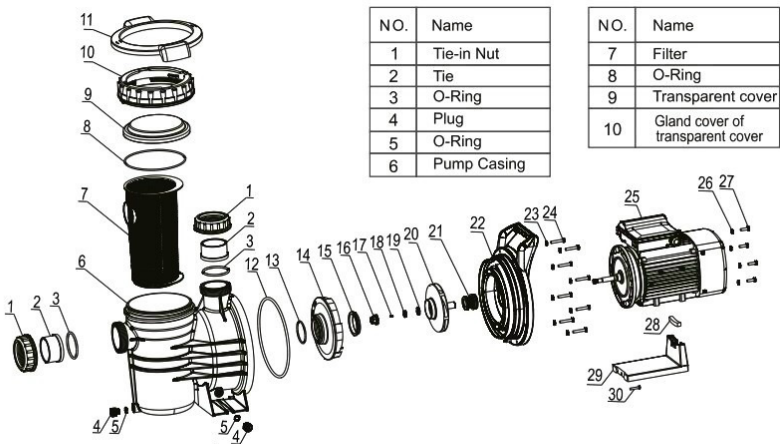

NO.	Name
11	Transparent cover handle
12	O-Ring
13	O-Ring
14	Difusser
15	Activities Rings
16	Impeller Nut
17	Key
18	Spring washer
19	O-Ring
20	Impeller
21	Mechanical Seal
22	Pump Cover
23	Washer
24	Hexagon bolt
25	Motor
26	Washer
27	Hexagon bolt
28	Rubber gasket
29	Base
30	Tapping screw