



KR/KRS 15

Installation drawing

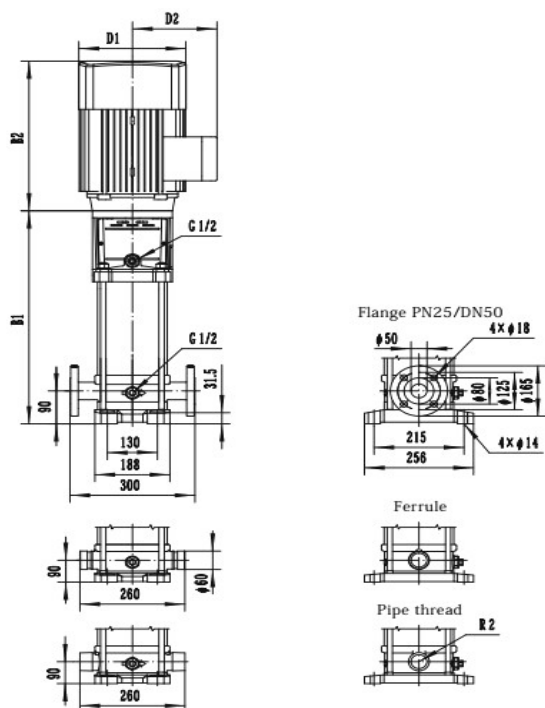

Performance curve

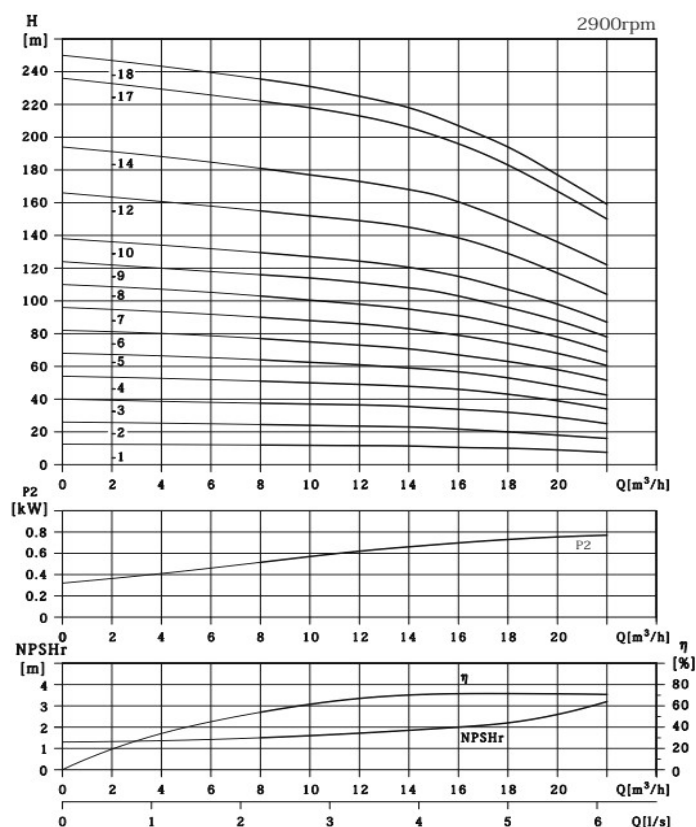

Model	Motor (kW)	Q (m³/h)	0	8	10	12	14	15	16	18	20	22
KR15-1	1.1	H (m)	12.5	12	11.8	11.6	11.4	11	10.5	10	9	7.5
KR15-2	2.2		26	24.5	24	23.5	23	22.5	21.5	20	18	16
KR15-3	3		40	37.5	37	36.5	35.5	34.5	34	32	29	25
KR15-4	4		54	51	50	49	47.5	47	46	43	39	34
KR15-5	4		68	64	62	61	59	58	57	53	48	42.5
KR15-6	5.5		82	77	75	73	71	69	67	63	58	51.5
KR15-7	5.5		96	90	88	86	83	81	79	74	68	60.5
KR15-8	7.5		110	103	100	98	95	93	91	85	78	69
KR15-9	7.5		124	116	113	111	108	106	103	96	88	78
KR15-10	11		138	129	126	124	121	118	115	107	98	87
KR15-12	11		166	155	152	149	145	142	138	129	117	104
KR15-14	11		194	181	177	173	168	165	160	149	136	122
KR15-17	15		236	222	218	213	206	201	196	183	167	150
KR15-18	15		250	235	231	225	218	213	207	194	177	159

Model	Dimensions (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
KR15-1	387	245	632	170	142	33
KR15-2	397	290	687	190	155	42
KR15-3	452	345	797	197	165	51
KR15-4	497	355	852	230	188	60
KR15-5	542	355	897	230	188	62
KR15-6	665	390	1055	260	208	78
KR15-7	710	390	1100	260	208	80
KR15-8	755	390	1145	260	208	86
KR15-9	800	390	1190	260	208	88
KR15-10	875	500	1375	330	255	166
KR15-12	965	500	1465	330	255	170
KR15-14	1055	500	1555	330	255	173
KR15-17	1190	500	1690	330	255	186
KR15-18	1235	500	1735	330	255	188