



KR/KRS 5

Installation drawing

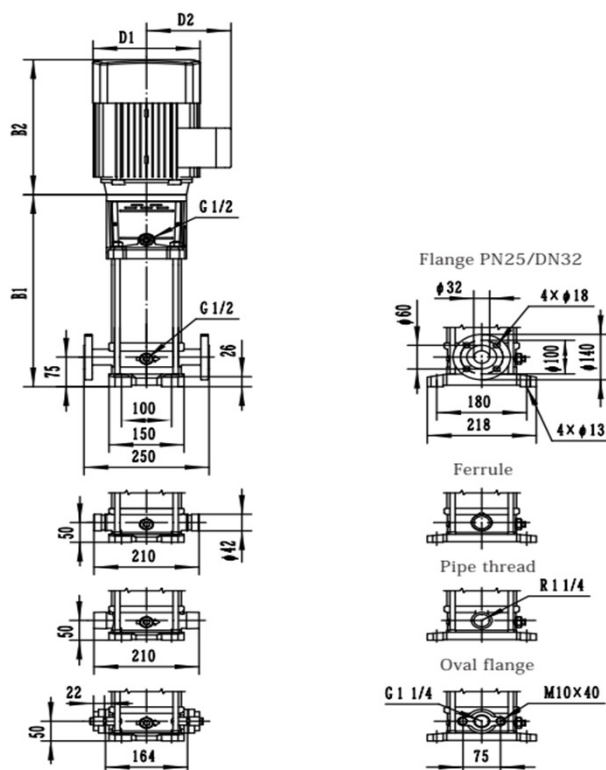

*KR/KRS 5-21 ~ 5-33 No oval flange connection

Performance curve

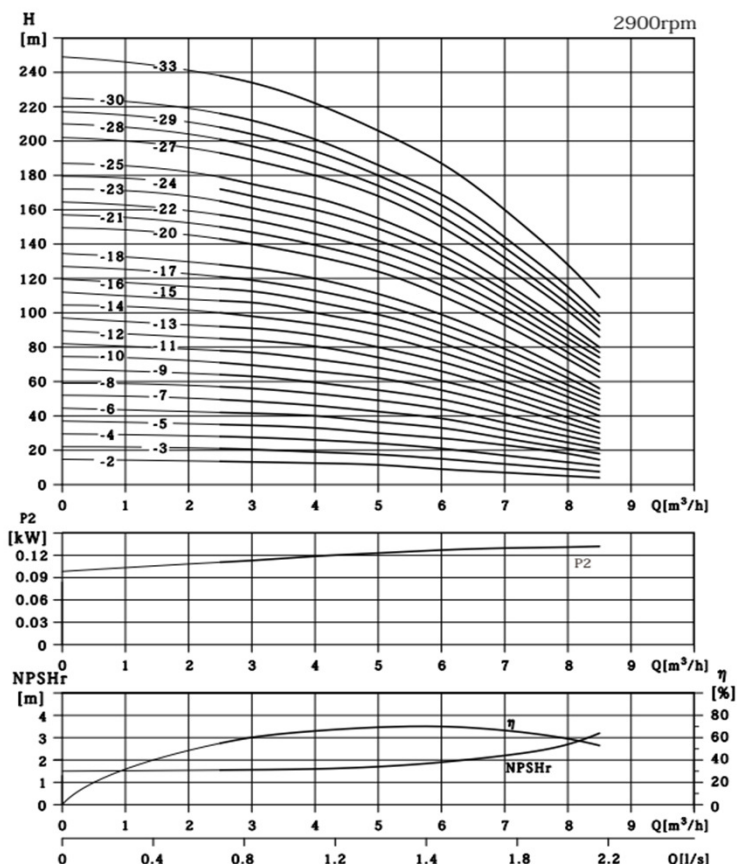

Model	Motor (kW)	Q (m³/h)	0	2.5	3	4	5	6	7	8	8.5
KR5-2	0.37	H (m)	14.7	13.5	13.2	12.5	11.5	9	7	5	4
KR5-3	0.55		22	21	20.5	19	17.5	15	12	9	7.5
KR5-4	0.55		29.5	28	27.5	26	24	21	17	13	11
KR5-5	0.75		37	35	34.5	33	30	27	23	18	14.5
KR5-6	1.1		44.5	42	41.5	40	36.5	33	27	21	18
KR5-7	1.1		52	49.5	48.5	46	42.5	38.5	31.5	24.5	21
KR5-8	1.1		59	57	56	53	49	44	36	28	24
KR5-9	1.5		67	64	63	59.5	55	49.5	41	31.5	27
KR5-10	1.5		74.5	71	69.5	66	62	55	46	35.5	30
KR5-11	1.5		82	78	77	73	68	60.5	51	39	33
KR5-12	2.2		89.5	85	84	80.5	74	66	55	43	36.5
KR5-13	2.2		97	92	91	87	80	71.5	60	47	40
KR5-14	2.2		104.5	100	98	93.5	87	77	65	51	43.5
KR5-15	2.2		112	107	106	100	93	82.5	69	54.5	46.5
KR5-16	2.2		119.5	114	112.5	106.5	99	88	74	58	50
KR5-17	3		127	121	119	113	105	93.5	79	62	53
KR5-18	3		134.5	128	126	120	111	99	84	66	56
KR5-20	3		149.5	143	140	133	124	110	93	73	62.5
KR5-21	3		157	150	147	139.5	130	116	98	77	66
KR5-22	4		164.5	157	154	146	136	122	103	81	70
KR5-23	4		172	165	161	153	142	128	108	85	74
KR5-24	4		179.5	172	168	160	149	133.5	113	89	77
KR5-25	4		187	179	175	167	155	139	117.5	93	80
KR5-27	4		202	193	189	180	168	150	127	101	86
KR5-28	4		210	201	197	187	174	156	132	105	90
KR5-29	5.5		217	208	204	194	180	162.5	138	110	94
KR5-30	5.5		225	216	212	201	186	169	144	115	98
KR5-33	5.5		249	238	234	222	206	187	160	128	109

Model	Dimensions (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
KR5-2	276	225	501	148	117	22
KR5-3	303	225	528	148	117	24
KR5-4	330	225	555	148	117	25
KR5-5	367	245	612	170	142	28
KR5-6	394	245	639	170	142	30
KR5-7	421	245	666	170	142	30
KR5-8	448	245	693	170	142	31
KR5-9	485	290	775	190	155	36
KR5-10	512	290	802	190	155	36
KR5-11	539	290	829	190	155	37
KR5-12	566	290	856	190	155	41
KR5-13	593	290	883	190	155	41
KR5-14	620	290	910	190	155	42
KR5-15	647	290	937	190	155	42
KR5-16	674	290	964	190	155	43
KR5-17	711	345	1056	197	165	51
KR5-18	738	345	1083	197	165	51
KR5-20	792	345	1137	197	165	52
KR5-21	819	345	1164	197	165	52
KR5-22	846	355	1201	230	188	59
KR5-23	873	355	1228	230	188	59
KR5-24	900	355	1255	230	188	60
KR5-25	927	355	1282	230	188	60
KR5-27	981	355	1336	230	188	61
KR5-28	1008	355	1363	230	188	61
KR5-29	1113	390	1503	260	208	83
KR5-30	1140	390	1530	260	208	83
KR5-33	1221	390	1611	260	208	84